


The Nautis Chrono 500 Timepiece

(17065-A – 17065-J)

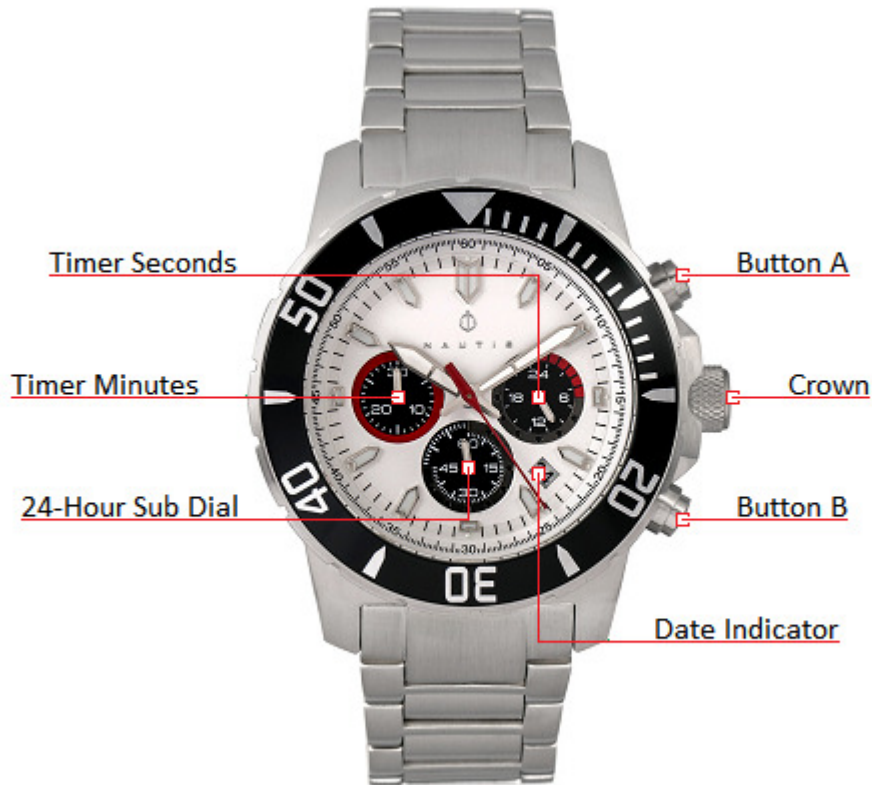

Setting Instructions

- 1) Unscrew the crown by rotating it counterclockwise.
- 2) Pull the crown out two clicks.
- 3) Set the current time by rotating the crown clockwise;
- Reference the 24-hour sub dial to ensure AM / PM hours are observed accordingly (0-12 = AM / 12-24 = PM).
- 4) Push the crown in one click.
- 5) Set the current date by rotating the crown clockwise.
- 6) Push the crown in one click to commence timekeeping.
- 7) Secure the crown to the case by pushing inwards on the crown then rotating it clockwise. *Finger-tighten only.*

Note: Setting the time to AM / PM accordingly ensures the date indicator changes at midnight. If the date indicator is changing in the afternoon, advance the hour hand one full rotation (12 hours), then reset the date indicator as necessary.

Timer Functions

Button A – Start / Pause

Button B – Reset

Timer Seconds Sub Dial – Elapsed Time in Seconds

Timer Minutes Sub Dial – Elapsed Time in Minutes

Timer Hand Adjustment

- 1) Unscrew the crown and pull it out two clicks.
- 2) Press button **A** to move the timer sub dial hands clockwise, press button **B** to move them counterclockwise.
- 3) Secure the crown back to the case once the hands have been adjusted to the desired position.

Note: Pressing button A or B *once* will advance the hands one increment at a time. Pressing and holding button A or B will advance the hands at an accelerated rate.

Water Resistance Guidelines

50 ATM - suitable for swimming, and light watersports. Not designed for use in extreme temperatures or environments.

Note: The crown must be fully screwed down to achieve the rated water resistance. Additionally, manipulation of the crown or buttons while the watch is in contact with water will negate the rated water resistance, as water penetration may occur.